

# 4W COMPACT HANDHELD CB TRANSCEIVER CB-127

INSTRUCTION MANUAL

**danita**

www.midtkom.dk

P/N 820-TCH0-DK0

## Our Thanks to You

Thank you for purchasing a Danita CB TRANSCEIVER radio. Properly used this product will give you many years of reliable service.


All our products are built to offer excellent value by combining advanced features, great design and manufacturing quality.

To ensure you are familiar with the operation and features of your radio, and in order to obtain the best performance, please read this manual carefully before operation.

## 1. Supplied Accessories


CB-127 is supplied with a full range of accessories to help you get started and virtually benefit from all the features straight away.

- > Charger Package
- CB-127 transceiver 1unit
- Antenna 1unit
- Li-Ion rechargeable battery 1unit
- Charging cradle 1unit
- Power cable 1unit
- Belt clip 1unit




## 2. Fitting the Battery Pack / Battery Eliminator

> Fitting  
Ensure that your radio is switched off. Align the battery pack with the battery guide and Slide the battery pack up to the top until you hear the snapping sound.



> Removal  
Ensure that your radio is switched off. Press down on the battery release catch and separate the battery pack from the radio.



## 3. Battery Charging

- 1) Connect the power adaptor to the main power supply and connect the adaptor charger jack to the charging cradle.
- 2) Disconnect any radio accessories and ensure the radio is switched off.
- 3) Insert the radio into the charging cradle until it clicks home. The charger LED will glow red and charging will start. If the charger LED blinks red or green or the charger LED does not light, re-insert the radio into the charging cradle.
- 4) The battery charging time is about 4-5 hours. When the battery is fully charged the charger LED will turn green.

Power Adaptor  
- Input : 230VAC  
- Output : 12VDC 1Ah

Note :

- Upon the red LED blinking, there is a doubt on the battery quality.
- Upon the orange LED blinking, there is a doubt on the high temperature of the battery. In this case, separate the battery from the cradle and try again after cooling.

## 5. Trouble Shooting

If you experience problems with your CB-127, first check the battery power level or connection of battery eliminator as low batteries can cause problems such as poor transmission, weak reception and reduced sound quality. Then check the manual and radio display to ensure that a function (such as VOX or Lock) has not been activated by accident.

- 1) Switch off the transceiver.
- 2) Press and hold PTT button and Backlighting button, switch on the transceiver.
- 3) Wait for a while until reset display appears.

All the memories are erased by this reset and the parameters return to the initial factory setting. In case of further difficulty, please consult your dealer or visit our website at www.ttkorea.co.kr.

## 6. Safety Requirement


For charging the rechargeable battery, only a CE approved AC adaptor complying with the following specifications must be used.

INPUT : 230VAC 50Hz  
OUTPUT : 12VDC 1Ah

For direct operation by battery eliminator, following cigar adaptor must be used.

INPUT : 12/24VDC  
OUTPUT : 12VDC 3Ah

## 4. Transceiver Controls, Display and Functions

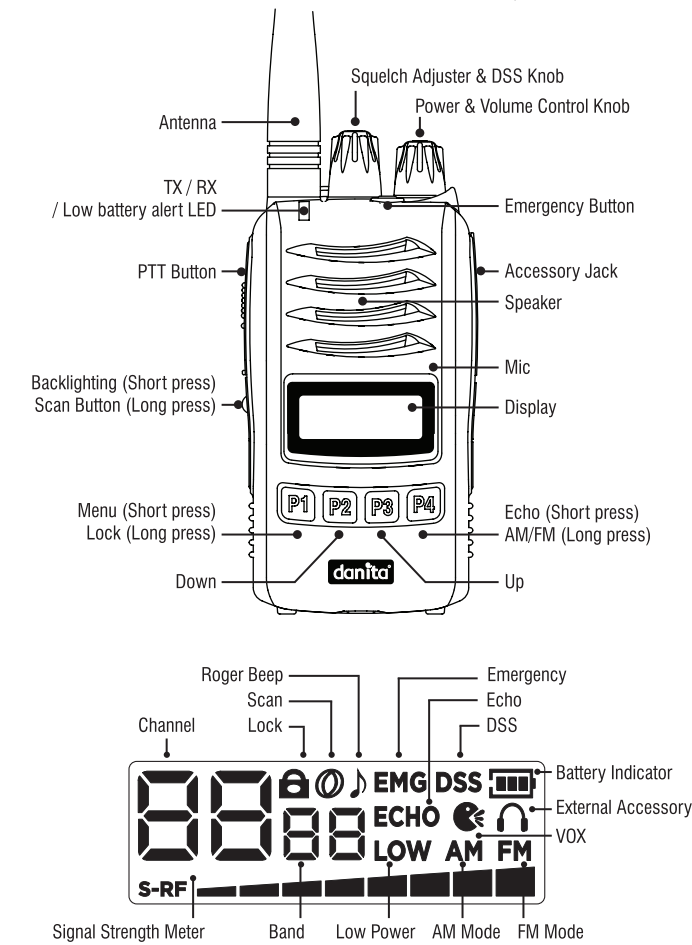

1) Power On/Off & Volume Control Knob  
Turn this knob clockwise to switch on. The more you turn this knob clockwise, the bigger the audio sound grows.

2) Squelch Adjuster and DSS (Dynamic Squelch Tuning System)  
DSS : Default. The squelch level of your transceiver is dynamically adjust to get the best receive condition.  
Squelch Adjuster : Turn this knob clockwise to the max. Turn counter-clockwise until you hear background noise and then turn the knob to the opposite direction until the noise disappears.

3) Emergency Button  
Press this button to go to emergency channel (9 or 19). To return to the previous operation mode, press EMG button again.

4) PTT Button  
While pressing this button, you can transmit. The Red LED lights during the PTT press.

5) Backlighting & Scan Button  
Short press to change backlighting color (Red / Green / Amber / Off)  
Long press to activate/deactivate channel scan. While scanning, press Up/Down button to change scanning direction.

6) Menu / Lock Button  
Short press to access menu mode. Use the Up/Down button to change the setting.  
Long press to activate/deactivate keypad lock function.

<MENU>

Display	Functions	Settings
bn	Band	See next band chart
Pa	Power	FM : High and Low AM : Low only
rb	Roger Beep Tone	On and Off
bP	Key Beep Tone	On and Off
Uo	VOX	Off, Low, Middle, High

<BAND Chart>

Setting	Display	Settings
EC	EC	Europe 40ch. FM 4W
EU	EU	Europe 40ch. AM/FM 4W
D	d	Germany 80ch. FM 4W, 40ch. AM 4W
I2	i2	Italy 34ch. AM/FM 4W
I	i	Italy 40ch. AM/FM 4W
UE(EU/UK)	UE	UK 40ch. FM 4W (British Frequencies) + CEPT 40ch. FM 4W(EC)
UK	UH	UK 40ch. FM 4W (British Frequencies)
PL	PL	Poland 40ch. AM/FM 4W (Polish Frequencies : 5KHz)
F	F	France 40ch. FM 4W, 40ch AM 4W
E	E	Spain 40ch. AM/FM 4W

7) Channel Up/Down Button  
Short press to change channel.  
Long press to speed up channel change.

8) Echo & AM/FM Button  
Short press to activate/deactivate Echo TX sound.  
Long press to switch AM/FM mode.

9) Signal Strength Meter (S-RF)  
Low transmitting power shows four S-RF meters.  
High transmitting power shows full eight S-RF meters.  
While receiving signal, actual reception signal strength is on display.

10) Low Batter Alert  
In case Low battery, LED and battery indicator are blinking with alert sound for every 15 seconds.

## 7. Specifications

GENERAL	
Channel	40 (See the frequency band chart)
Frequency Range	26.965 MHz ~ 27.405 MHz
Operating mode	F3E (FM), A3E (AM)
Frequency Control	PLL Synthesizer
Frequency Tolerance	0.002%
Operating Temperature Range	-10 to +55 °C
Power Supply	7.4V (Li-Ion Battery) 12/24VDC (Battery Eliminator)
Size	57 (W) x 116 (H) x 39 (D)
Weight	224 grams with Battery pack
Antenna Connector	SMA type
TRANSMITTER	
Power Output	Duty cycle 10% 4 Watts @ 13.2V DC
Modulation	AM: from 85% to 95% FM: 1.8KHz ± 0.2KHz
Frequency Response	300Hz to 3000Hz
Output Impedance	50ohms, Unbalanced
Harmonic Suppression	Less than -54dBm
Current Drain	AM Full Mod. 1.6A Max.
RECEIVER	
Receiving System	Dual conversion superheterodyne
IF Frequencies	Double conversion 1st 10.695MHz/2nd 455KHz
Sensitivity	1.4µV for 10dB(S+N)/N in AM Mode 0.8µV for 20dB SINAD in FM Mode
Audio Output Power	1W @ 16ohm
Audio Distortion	Less than 8% @ 1KHz
Image Rejection	More than 60dB
Adjacent Channel Rejection	More than 60dB
Conducted Spurious	Less than -57dBm
Frequency Response	300Hz to 2500Hz
Built-in Speaker	16ohms, Round
Squelch	Adjustable; Threshold less than 1µV DSS; Less than 2µV

\* Specification is subject to change without prior notice.

10. Restrictions on the use

Country	Band	Use restrictions and other comments
BELGIUM SWITZERLAND	EU F EC	40 Ch - 4W FM - Individual licence is required 40 Ch - 4W AM - Individual licence is required
DENMARK,NORWAY LUXEMBOURG,CZECH	EC	40 Ch - 4W FM - Free use
FINLAND,PORTUGAL FRANCE,NETHERLANDS	EU F EC	40 Ch - 4W FM - Free use 40 Ch - 4W AM - Free use
GERMANY	D EU D2 EC	80 Ch - 4W FM - Individual licence is required 40 Ch - 4W AM - Individual licence is required 40 Ch - 4W AM - Use ch 4-15 only 40 Ch - 4W FM - Free use 12 Ch - 4W AM - Individual licence is required
fx Allowed: from 26.960 to 27.410 MHz "BAPT 222 ZV 104"		
GREECE	E EU F I EC	40 Ch - 4W FM - Free use 40 Ch - 4W AM - Free use
T/R 20-02		
IRELAND	E EU F I EC	40 Ch - 4W FM - Free use 40 Ch - 4W AM - Free use
S.I. No 436 of 1998. WIRELESS TELEGRAPHY ACT, 1926 (SECTIONS) (EXEMPTION OF CITIZENS' BAND (CB) RADIOS) ORDER, 1998		
ITALY	E EU F I EC 12	40 Ch - 4W FM - General authorization is required 40 Ch - 4W AM - General authorization is required 34 Ch - 4W FM 34 Ch - 4W AM(ERP) *AM mode allowed on ch1-23 only
PNF issued on DM 08.07.02 NOTES 49 A-B-C-D-E-G		
SPAIN	E EU F EC	40 Ch - 4W FM - Individual licence is required 40 Ch - 4W AM - Individual licence is required
Art. 57 - Law 11/1998 dated 24th April		
SWEDEN	EU F EC	40 Ch - 4W FM - Free use 40 Ch - 4W AM - Individual licence is required
UK	UK EU EC	40 Ch - 4W FM - Free use 40 Ch - 4W AM - Free use
POLAND	PL EU EC	40 Ch - 4W FM / AM - Free use

<< Declaration of Conformity >>

We, TTI Tech Co., Ltd. (#1312 361 Simindaero Dongan-gu Anyang-si Gyeonggi-do Korea) declare on our sole responsibility that this equipment complies with the essential requirements of the Radio Equipment Directive (RED) 2014/53/EU, and that any applicable Essential Test Suite measurements have been performed.

Kind of equipment : HANDHELD CB TRANSCEIVER

Type-designation : TCB-H100

Version (where applicable) :

This compliance is based on conformity with the following standards, specifications or documents :

EN 62311:2008	
EN 300 433	V2.1.1
EN 301 489-1	V2.2.3
EN 301 489-13	V1.2.1
EN 62368-1:2014+A11:2017	



N. Y. Kim  
Director

Korea, Dec. 31, 2019

Signature

<< Declaration of Identical Product >>

We, TTI Tech Co., Ltd. (#1312 361 Simindaero Dongan-gu Anyang-si Gyeonggi-do Korea) declare that we are the original manufacturer of the CB transceiver brand TTI and model TCB-H100, and we hereby declare that it is totally identical electronically and mechanically to the CB transceiver brand "Danita" and model "CB-127".

The mentioned two CB transceiver are different only by their brand name and model name marking for their commercial reasons only.

N. Y. Kim  
Director

Korea, Nov. 2022

Signature

<< Declaration of Conformity >>

Midtkom ApS Ølandsvej 48800 Viborg Denmark, as an importer, we declare on our own responsibility that this equipment complies with the essential requirements of the Radio Equipment Directive (RED) 2014/53/EU, and that any applicable Essential Test Suite measurements have been performed. This statement is issued based on the manufacturer's statement.

Kind of equipment : HANDHELD CB TRANSCEIVER

Type-designation : CB-127

Version (where applicable) :

This compliance is based on conformity with the following standards, specifications or documents :

EN 62311:2008
EN 50665:2017
EN 62368-1:2014+A11:2017
EN 301 489-1 V2.2.3:2019-11
EN 301 489-13 V1.2.1:2002-08
EN 300 433 V2.1.1 (2016-05)



Place and Date of issue :  
Denmark , Nov. 2022

Midtkom ApS  
Ølandsvej  
48800 Viborg  
Denmark